

PureLine DC PH

UV DECHLORINATION FOR FOOD AND BEVERAGE


Our **PureLine DC PH** UV systems deliver guaranteed high UV doses for effective free chlorine removal and treatment for the food and beverage industries. By using UV to remove the free chlorine we protect RO membranes from both residual chlorine and bio-fouling.

UV dechlorination provides distinct advantages over traditional technologies such as Activated Carbon Filtration (ACF) or Sodium Metabisulphite dosing (SMB). These proven chlorine removal methods are prone to microbial contamination and require significantly more operator involvement and plant room space than UV, leading to higher lifetime costs.




Application
Optimised UV for
Food & Beverage

POTENTIAL LOCATION OF THE PURELINE DC PH™

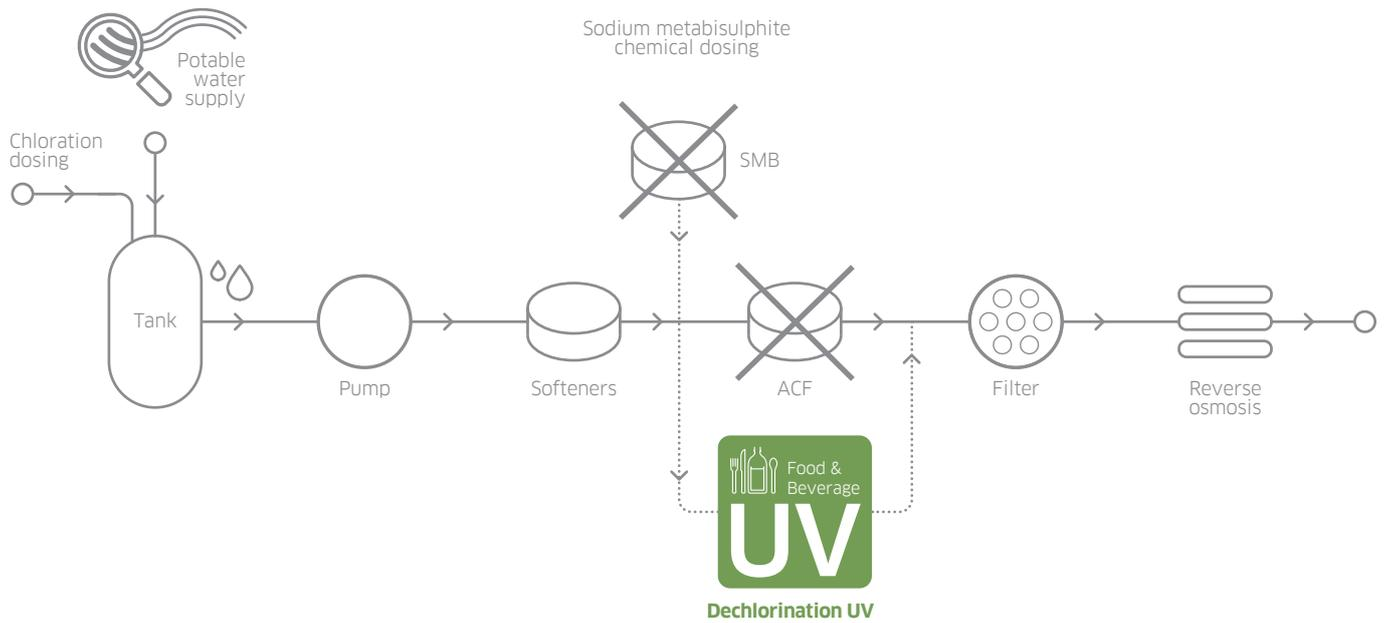

KEY FEATURES	WHAT IT GIVES YOU	BENEFITS FOR YOU
INTELLIGENCE		
UV intensity monitor	Continuous verification of performance with in-built low intensity alarm	Easy to monitor and log system performance
OPTIMISATION		
Medium pressure lamp	Provides high intensity UV light at 200 to 400 nm wavelengths ideal for the destruction of free chlorine (HOCl and OCl ⁻)	Prolongs the life of RO equipment by removing free chlorine
	Chemical free reduction of free chlorine	No risk of contamination or running out of chemical
	Unlike ACF does not require backwashing or media replacement	Saves on water and maintenance costs
	Provides high intensity active wavelengths to treat the water	Prolongs the life of RO equipment compared to ACF by reducing the bio-burden
Designed for the food and beverage industry	FDA-approved materials used for all wetted parts	Industry compliant materials
	*Chamber with <0.38 µm internal surface finish and tri-clamp connections	Sanitary design
	*Automatic wiper (quartz cleaning)	Self cleaning to maintain performance
INTEGRATION		
Compact design	Can be fitted to skids	Easy integration
	Can be retrofitted to existing process	
Robust design *Option	Maximum of 2 service visits annually	Easy to maintain compared to ACF and SMB dosing

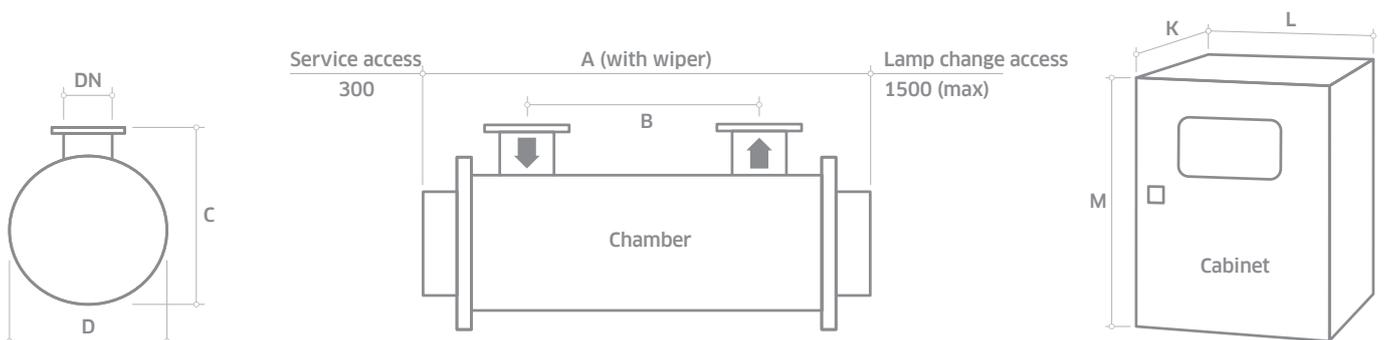

MODEL NUMBER	MAX POWER (KW)	MIN T10(%)	DIMENSIONS (MM)										APPROX WEIGHT (KG)	
			Chamber					Cab. No***	Cabinet (fan cooled)			Chamber Empty	Cabinet Fan cooled	
			A	B	C	D	DN		K*	L	M**			
PureLine DC PH 50	1.6	85	850	280	319	240	40	1	330	750	850	45	80	
PureLine DC PH 100	2.7	85	1300	682	319	240	40	1	330	750	850	50	85	
PureLine DC PH 200	4.2	85	1300	674	319	240	40	1	330	750	850	50	85	
PureLine DC PH 230	4.2	85	1300	674	319	240	50	1	330	750	850	50	85	
PureLine DC PH 250	5.8	85	1300	674	319	240	40	1	330	900	1100	50	165	
PureLine DC PH 300	5.8	85	1300	674	319	240	50	1	330	900	1100	50	165	
PureLine DC PH 305	5.8	85	1300	674	319	240	65	1	330	900	1100	50	165	
PureLine DC PH 315	7.8	85	1300	674	420	290	80	1	330	1100	1100	50	165	
PureLine DC PH 320	12.5	85	1300	674	420	290	80	1	330	1100	1600	65	265	
PureLine DC PH 360	16.5	85	1300	674	420	290	100	1	330	1100	1600	65	282	
PureLine DC PH 380	16.5	85	1300	674	505	410	150	1	330	1100	1600	65	282	
PureLine DC PH 400	25.2	85	1300	674	505	410	50	1 CC	330	900	1100	140	165	
								1 PC	330	1100	1600		282	
PureLine DC PH 500	25.2	85	1300	674	505	410	100	1 CC	330	900	1100	140	165	
								1 PC	330	1100	1600		282	
PureLine DC PH 600	25.2	85	1300	674	505	410	150	1 CC	330	900	1100	140	165	
								1 PC	330	1100	1600		282	
PureLine DC PH 800	33	85	1300	674	505	410	150	1 CC	330	1100	1600	140	282	
								1 PC	330	1100	1600		282	
PureLine DC PH 1000	33	85	1300	610	540	430	200	1 CC	330	1100	1600	185	282	
								1 PC	330	1100	1600		282	

All dimensions are approximate for clearance purposes only. We have a policy of continuous product development, exact drawings are available on request. All specifications are subject to change without notification. Your distributor or our account manager can advise on correct sizing and specification requirements.

* Allow dimension L in front of cabinet for door opening and panel access.

** M dimension includes the space for the cabinet mounting brackets but you need to allow space below the cabinet for cable entry and access (minimum of 250 mm).

UV CHAMBER

Material:	Stainless steel 316L / 1.4404
Internal finish:	As made pipe and tube, welds as laid, electropolished and passivated
External finish:	Sateen polish (120 grit) electropolished and passivated
Process (mating) connections:	Flange EN 1092-1 PN16
Drain connection:	Tri-clamp
End plate:	Removable end plate
Degree of protection:	IP65 equivalent to NEMA 4 but not for outside use
Arc tube (lamp):	Medium pressure
Arc tube enclosure:	Pure quartz (F200)
Number of arc tubes (lamps):	1 (DC PH 50-300), 3 (DC PH 320), 4 (DC PH 360-380), 6 (DC PH 400-500), 8 (DC PH 800-1000)
Expected lamp life:	4000 hours DC PH 250 and 300
Temperature sensor:	Yes
UV monitor:	Wet UV monitor
Working fluid temperature:	1°C to 60°C (80°C unwiped)
Maximum CIP temperature:	95°C with cabinet electrically isolated
Hydrostatically pressure tested:	Yes to PED requirements EN 13445
Chamber mounting:	Horizontal only
Operating pressure:	6 bar (positive pressure only)
Seals:	EPDM, ADI free, EC 1935/2004, FDA 21 CFR 177.2600 approved

OPTIONS

Document Support Pack	
Cabinet material:	Stainless steel 316
Operation and Maintenance manual and printed Installation and Commissioning manual in Chinese, English, French, German and Spanish	
Wiper:	Automatic (electrically driven)
Flange options:	ANSI 150, JIS, Table 'E' and tri-clamp
Chamber internal finish:	<0.38 µm welds polished out, electropolished and passivated
Lead length:	20 m, 30 m or 50 m cabinet to chamber
Bleed valve:	Hygienic valve with tri-clamp connection
Maximum CIP temperature:	130°C (panel switched off)
Welder Document Pack for chamber construction	

OPTIONS (CONTINUED)

Skid mounting (not shipboard or earthquake zone)	
Operating pressure:	10 bar
Air vent connection:	Tri-clamp blanked off
Stainless steel cabinet IP upgrade: air to air heat exchangers stainless steel IP 56, NEMA 4X, relative humidity <95% non-condensing. If fitted no UL listing. See sales drawings for sizes.	
Aggressive water package: For 400 ppm to 20000 ppm chloride water	
UVShield™: Power cut-out for lamp access (except DC PH 320 to 1000)	
Water leak detection: Detects water leaks from quartz sleeve (except DC PH 320 to 1000)	
Arc tube enclosure: Doped quartz F240 (reduces performance)	

CABINET (CONTROLLER PHOTON)

Material:	Polyester coated carbon steel
Degree of protection:	IP54 NEMA 12
Supply voltages (nominal):	DC PH 50-100 95 V to 260 V (+/-10%) DC PH 200-300 190 V to 480 V (+/-10%) DC PH 320-1000 380 V to 480 V (+/-10%) 50/60 Hz
Operating temperature range:	5°C to 40°C
Relative humidity:	<85% non-condensing
Cooling fans:	Yes
Interconnecting cable lengths:	10 m cabinet to chamber

CUSTOMER OUTPUTS

4-20 mA passive or active output:	UV intensity %
VFC outputs:	System warning, lamp ready, low UV intensity, common trip, remote reset, ELCB or water leak, system available, local or remote mode

CUSTOMER INPUTS

4-20 mA passive or active input:	Flow meter
VFC inputs:	Remote stop/start and remote reset

CUSTOMER COMMUNICATIONS PORT

None

APPROVALS

CE marked, UL listed E149108



PureLine DC+DCD

Also available in our Food & Beverage product range...




Treatment as part of a multi-barrier approach



Ozone removal and treatment



3rd party bioassayed systems for critical treatment or as a pathogen barrier

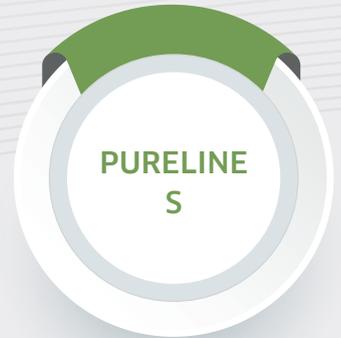

Sugar syrup treatment

Canada

+1 980 256 5700
americas@nuvonicuv.com

China

+86 21 6167 9599
apac@nuvonicuv.com

Germany

+44 175 351 5300
emea@nuvonicuv.com

Malaysia

+60 16 440 8834
sea@nuvonicuv.com



Mexico

+1 980 256 5700
americas@nuvonicuv.com

United Kingdom

+44 175 351 5300
emea@nuvonicuv.com

USA

+1 980 256 5700
americas@nuvonicuv.com



NUVONIC

A Halma company

formerly Aquionics, Berson, Hanovia and Orca GmbH

