

# DFN

## Low Pressure Duplex Filter Assembly

Designed to maintain continuous filtration, even throughout element servicing, the DFN series filter assemblies provide a compact and user-friendly 4-way, 2 position housing completely sealed from the atmosphere. Remove particulate and water from a variety of fluids including hydrogen seal, oil, turbine lube oil, bearing lube oil, and FD-ID-PA fan lube.

Ideal for systems where filters must be serviced without system interruption such as hydraulic, gearbox, wind turbine, boiler feed pump, mechanical/ electro hydraulic control, and servo systems.

**Max Operating Pressure: 888 psi (61.2 bar)**



[hyprofiltration.com/](http://hyprofiltration.com/)



## Two positions, one result.

DFN housings provide unmatched in-line filtration with incredible ease of use. With a squeeze of the trigger and turn of the wrist, you'll introduce a new element to your fluid while simultaneously valving the used element out of service to easily change and replace, all while your system continues operating at full capacity.



## All duplexes are not created equal.


Air in any lube system can quickly cause failure and force you to take your system down for maintenance. DFN assemblies utilize internal equalization and external vent ports to automatically push oil into and purge air out from the unused housing without any added effort.

## Elements that go beyond industry standard.


DFE rated advanced media technologies provide the highest level of particulate capture and retention capabilities so your equipment operates unimpeded by contamination. With media options down to  $\beta_{3[C]} \geq 4000$  + water absorption, you get the perfect element for your application, every time.



## DFN19 Installation Drawing

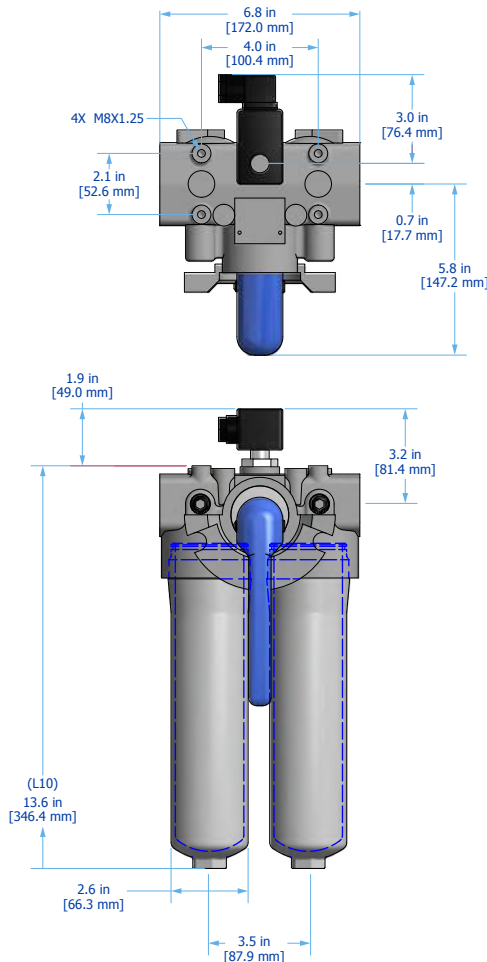

## DFN39 Installation Drawing

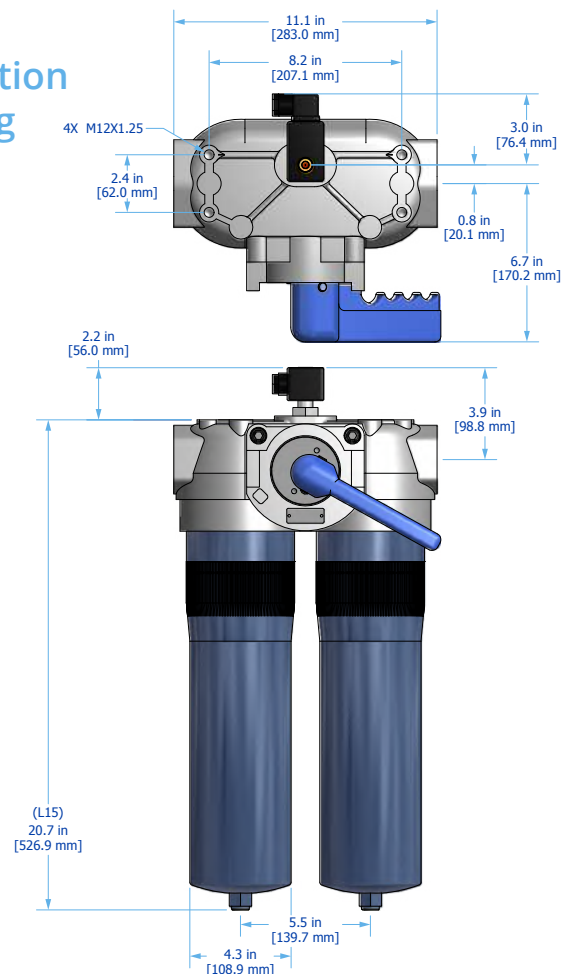

# DFN Specifications

Dimensions	See Installation Drawing on page 251 for model specific dimensions.									
Operating Temperature	<b>Fluid Temperature</b> 30°F to 225°F (0°C to 105°C)			<b>Ambient Temperature</b> -4°F to 140°F (-20C to 60C)						
Operating Pressure	<b>DFN19</b> 888 psi (61.2 bar) max			<b>DFN39</b> 350 psi (24.1 bar) max						
ΔP Indicator Trigger	32 psid (2.21 bard)									
Element Collapse Rating	<b>Normal Collapse (Collapse Option N)</b> 450 psid (31.0 bard)				<b>High Collapse (Collapse Option H)</b> 3000 psid (206.8 bard)					
Materials of Construction	<b>Head</b> Aluminum		<b>Bowl</b> Aluminum		<b>Interior Coating</b> Anodized					
Media Description	<b>M</b> G8 Dualglass, our latest generation of DFE rated, high performance glass media for all hydraulic & lubrication fluids. $\beta_{x_{c1}} \geq 4000$			<b>A</b> G8 Dualglass high performance media combined with water removal scrim. $\beta_{x_{c1}} \geq 4000$			<b>W</b> Stainless steel wire mesh media $\beta_{x_{c1}} \geq 2$ ( $\beta_x \geq 2$ )			
Replacement Elements	To determine replacement elements, use corresponding codes from your assembly part number:									
	<b>Series Code</b>	<b>Filter Element Part Number</b>					<b>Example</b>			
	19	HP19[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]					HP19HL6-10MB			
	39	HP39[Collapse Code] L [Length Code] – [Media Selection Code][Seal Code]					HP39NL6-6AV			
Filter Assembly Sizing <sup>1</sup>	Filter assembly clean element ΔP after actual viscosity correction should not exceed 10% of filter assembly bypass setting. See below for viscosity correction formula. For applications with extreme cold start condition contact Hy-Pro for sizing recommendations.									
	Step 1: Calculate ΔP coefficient for actual viscosity									
	Using Saybolt Universal Seconds (SUS)				Using Centistokes (cSt)					
	$\Delta P$ Coefficient	=	$\frac{\text{Actual Operating Viscosity}^1 \text{ (SUS)}}{150}$	X	$\frac{\text{Actual Specific Gravity}}{0.86}$	$\Delta P$ Coefficient	=	$\frac{\text{Actual Operating Viscosity}^1 \text{ (cSt)}}{32}$	$\frac{\text{Actual Specific Gravity}}{0.86}$	
	Step 2: Calculate actual clean filter assembly ΔP at both operating and cold start viscosity									
	Actual Assembly Clean ΔP = Flow Rate X ΔP Coefficient (from Step 1) X Assembly ΔP Factor (from sizing table)									
ΔP Factors <sup>1</sup>	<b>Model</b>	<b>Length</b>	<b>Units</b>	<b>Media</b>						
				<b>1M</b>	<b>3M</b>	<b>6M</b>	<b>10M</b>	<b>16M</b>	<b>25M</b>	<b>**W</b>
	DFN19N	L10	psid/gpm	1.4943	1.2610	1.0420	0.7820	0.6489	0.6250	0.3130
			bard/lpm	0.0272	0.0230	0.0190	0.0142	0.0118	0.0114	0.0057
	DFN39N	L15	psid/gpm	0.4633	0.3910	0.3010	0.2660	0.2180	0.2100	0.1170
			bard/lpm	0.0084	0.0071	0.0055	0.0048	0.0040	0.0038	0.0021

<sup>1</sup>Max flow rates and ΔP factors assume u = 150 SUS, 32 cSt. See filter assembly sizing guideline for viscosity conversion formula on page 22 for viscosity change.

# DFN Part Number Builder

DFN       -

Series      Connection      Collapse      Length      Bypass      ΔP Indicator      Media      Seal

Series      **19**    25 gpm (95 lpm) max flow rate<sup>1</sup>  
**39**    70 gpm (265 lpm) max flow rate<sup>1</sup>

Connection      **DFN19**      **DFN39**  
**F16**<sup>2</sup> 1" Code 61 flange      **F24**<sup>2</sup> 1½" Code 61 flange

Collapse Rating      **H**    3000 psid (206.8 bard)  
**N**    450 psid (31.0 bard)

Element Length      **DFN19**      **DFN39**  
**10**    10" (25 cm) nominal length filter element and housing      **15**    15" (38 cm) nominal length filter element and housing

Bypass      **3**    Integrated bypass – 50 psid (3.4 bard)  
**X**    No bypass

ΔP Indicator      **D**    Visual with electric switch (DIN connection)  
**V**    Visual/Mechanical  
**X**    No indicator (port plugged)

Media Selection	<b>G8 Dualglass</b>	<b>G8 Dualglass + water removal</b>	<b>Stainless wire mesh</b>
<b>1M</b>	β <sub>3</sub> [C] ≥ 4000	<b>3A</b> <sup>3</sup> β <sub>5</sub> [C] ≥ 4000	<b>25W</b> 25μ nominal
<b>3M</b>	β <sub>5</sub> [C] ≥ 4000	<b>6A</b> <sup>3</sup> β <sub>7</sub> [C] ≥ 4000	<b>40W</b> 40μ nominal
<b>6M</b>	β <sub>7</sub> [C] ≥ 4000	<b>10A</b> <sup>3</sup> β <sub>12</sub> [C] ≥ 4000	<b>74W</b> 74μ nominal
<b>10M</b>	β <sub>12</sub> [C] ≥ 4000	<b>25A</b> <sup>3</sup> β <sub>22</sub> [C] ≥ 4000	<b>149W</b> 149μ nominal
<b>16M</b>	β <sub>17</sub> [C] ≥ 4000		
<b>25M</b>	β <sub>22</sub> [C] ≥ 4000		

Seals      **B**    Nitrile (Buna)  
**V**    Fluorocarbon

<sup>1</sup>When selected, must be paired with Seal option "V." Contact factory for more information or assistance in fluid compatibility.

<sup>2</sup>Metric threads for flange connection bolts. See Appendix for exact connection sizes and specifications.

<sup>3</sup>Water Removal Media available only with Collapse option "N."

For all up to date option details and compatibilities, please reference our [Contamination Solutions Price List](#) or [contact customer service](#).

Want to find out more? Get in touch.

hyprofiltration.com  
 info@hyprofiltration.com  
 +1 317 849 3535

© 2021 Hy-Pro Corporation. All rights reserved.



MKTLITFAS-DFN-081721-EM