



GAMMON TECHNICAL PRODUCTS, INC.
P.O. BOX 400 - 2300 HWY 34
MANASQUAN, N.J. 08736

PHONE 732-223-4600
FAX 732-223-5778


WEBSITE www.gammontech.com
STORE www.gammontechstore.com

**SENSING HOSE,
DEADMAN HOSE,
& ACCESSORIES**

**BULLETIN 78
(03-23)**

DUAL AIR - FUEL SENSING HOSE

BOTH HOSES HAVE 3/8" NITRILE TUBES FOR FUEL RESISTANCE

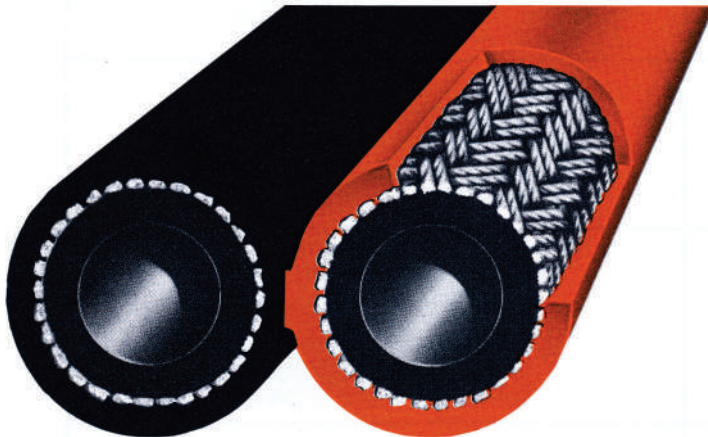

ORDER MODEL GTP-2123

For hydrant pit valve connection to the cart or servicer. The orange hose is for air pressure reference; the black hose is for fuel pressure sensing. Both hoses are braided reinforced and are formed together in a continuous bond. Both hoses have 3/8" inside diameter nitrile (Buna N) tubes for fuel resistance, and outer covers of neoprene. They are manufactured exclusively for Gammon Technical Products to our specifications. We are confident that this is the most durable and reliable dual sensing hose available.

Available in cut lengths or reels, with or without fittings.

Operating pressure rating: 200 psi
Burst pressure rating: More than 800 psi

DEADMAN HOSE

BOTH HOSES HAVE NEOPRENE CONSTRUCTION - BUNA-N TUBES



ORDER MODEL GTP-1202

Note: all standard 1/4" twin welding hose has neoprene tube, which will fail when fuel gets in the air system. This hose has Buna N nitrile rubber tubes.

Manufactured to Gammon Technical Products specifications, this hose is superior to any other deadman hose available on the market. It is suitable for all refueling operations.

The tubes are made of Buna N (nitrile rubber) to resist fuel from cross-leakage in the control system. The braided reinforced tubes have neoprene covers to resist oils that contaminate ramp areas. A special additive is included to give the cover superior resistance to cracking.

Available in cut lengths or reels, with or without fittings. 1/4" inside diameter.

Operating pressure rating: 200 psi
Burst pressure rating: More than 800 psi

FITTINGS AND CONNECTORS

MALE TUBE CONNECTOR

GTP-2421	-	4-2	1/4" tube, 1/8" NPT
		4-4	1/4" tube, 1/4" NPT
		4-6	1/4" tube, 3/8" NPT
		6-4	3/8" tube, 1/4" NPT
		6-6	3/8" tube, 3/8" NPT
		6-8	3/8" tube, 1/2" NPT



A 4-4 swivel version is also available as GTP-5862.

FEMALE TUBE CONNECTOR

GTP-2422	-	4-4	1/4" tube, 1/4" NPT
		4-6	1/4" tube, 3/8" NPT



ROTATABLE FEMALE TUBE CONNECTOR

Nut will rotate to allow tightening but will not swivel when tightened. Includes ball seat to male NPT nipple.

GTP-2423	-	4-4	1/4" tube, 1/4" NPT
		4-6	1/4" tube, 3/8" NPT
		6-4	3/8" tube, 1/4" NPT
		6-6	3/8" tube, 3/8" NPT



FERRULES

GTP-2424 For hoses with O.D. of 17/32", e.g. GTP-1202

GTP-2425 For hoses with O.D. of 23/32", e.g. GTP-2123



FERRULE CRIMPING TOOL

GTP-2426 use on 1/4" I.D. hose and 3/8" I.D. hose



STOP BALL

GTP-1203 Molded of durable plastic in two halves to form a sphere. The material is brilliant orange polyethylene. Holes for single or dual hose are custom drilled to fit. The outer diameter is 3".

